

New Product Newsletter & Product Review



Delta Breez 3M Karnak **Mid-States Soprema James Hardie** **Napco Geocel Eternabond** **Firestone Sunhaven Lead & Copper**



**Delta Breez VFB25ACL
Item #3030601**

- *Energy Star Certified with DC Motor technology
- *Noise level at 0.6 sones
- *Annual energy cost for 24/7 operation is approximately \$10.10
- *Energy efficiency of 8.5 CFM per Watt
- *Fan, Light, and Night-Light functions

VFB25ACL	4" Duct (Standard)	
Static Pressure (Inches w.g.)	0.1	0.25
Air Flow (CFM)	80	49
Sones	0.6	1.0
Power Consumption (Watts)	9.6	10.0
Energy Efficiency (CFM/Watt)	8.5	5.0
Speed (RPM)	904	1095
Current (Amps)	0.15 @ 120 Vac	
Power Rating (W/Hz)	120 / 60	
Lamp (Watts)	26	
Night-light (Watts)	4	



**Delta Breez VFB25AC
Item #3030600**

- *Energy Star Certified with DC Motor technology
- *Noise level at less than 0.3 sone
- *Annual energy cost for 24/7 operation is approximately \$7.47*
- *Energy efficiency of 11.7 CFM per Watt
- *Best price performance bath fan in the market

VFB25AC	4" Duct (Standard)	
Static Pressure (Inches w.g.)	0.1	0.25
Air Flow (CFM)	80	52
Sones	<0.3	N/A
Power Consumption (Watts)	7.1	8.3
Energy Efficiency (CFM/Watt)	11.7	6.5
Speed (RPM)	876	1111
Current (Amps)	0.12 @ 110 Vac	
Power Rating (W/Hz)	110-220/50-60	



**20 FT Web Retractable with Shock Pack
Item #3145120**

- Corrosion-resistant stainless steel and aluminum components for longer life
- Dual braking mechanism operates quickly, arresting a fall within two feet
- Limited nuisance lock-up
- Recertification required every two years

Attachment carabiner included



**11 FT Web Retractable with Shock Pack
Item #3145101**

- Lightweight design (under 4 lbs.)
- Durable aluminum housing
- Quick-action breaking system
- Meets or exceeds all industry standards
- No recertification required, considered a disposable unit



3M BLUE ADJUSTABLE HARD HAT

Item #3141220

Protective hard hat with comfortable 4-point ratchet suspension and standard brow pad. Meets requirements of ANSI/ISEA Z89.1-2009 Type 1, Class C, G and E.



3M LIGHT VISION PROTECTIVE EYE

Item #3141221

- Ultra-bright, adjustable LED light
- Long-lasting batteries provide up to 50 hours of continuous use
- Cushioned brow, nose bridge and temple tips • Soft nose bridge fits many face
- Includes microfiber storage bag and lanyard
- Polycarbonate lenses absorb 99.9% U
- Meets the High Impact Requirements of ANSI Z87.1-2003



3M SAFETY IN A BUCKET KIT 20058

Item #3141215

Contains:
Roof Anchor
Fall Arrest Harness



3M 5/8" BLENDED ROPE WITH ROPE GRAB

Item #3141218



3M REUSABLE STEEL ROOF ANCHOR

Item #3141217

Reusable Roof Anchor,
Hinged Steel to Fit Any Pitch



3M DISPOSABLE ROOFGRIP ANCHOR

Item #3141216

Roofgrip Disposable Anchor
For All Roof Pitches



3M LIGHTWEIGHT POLYESTER WEBBING

Item #3141219



3M NEON BLASTS CORDED EARPLUGS

Item #3141222

Soprema



Item #2220120 5 GAL ALSAN FLASHING

Item #2220122 1 GAL ALSAN FLASHING

Item #2220180 4" X 50' ALSAN FLASHING SCRIM

Item #2220182 6" X 50' ALSAN FLASHING SCRIM

ALSAN FLASHING is a patented polyurethane/bitumen resin, single-component, moisture cured compound that utilizes low solvent technologies. Used in combination with ALSAN PolyFleece, they create a watertight, puncture and UV resistant liquid applied flashing or field membrane that is preferred by roofing contractors, architects and building owners.



SOPREMA uses SBS modified asphalt in our complete line of roofing membranes resulting in the following benefits:

- Improved elongation
- Low temperature flexibility
- Elastic recovery
- Self adhesive properties
- Long term aging
- Ease of application

SOPREMA's heat applied SBS Modified Bitumen membranes

Through a mixture of chemically engineered components, SOPREMA membranes redefine the qualities indispensable to a high-performance roof membranes: elasticity, cyclic fatigue resistance and high resistance to heat aging. The membranes are composed of selected bitumens and SBS synthetic rubber polymers.



Item #2220200 1 SQ ELASTOPHENE SANDED BASE SHEET

Item #2220201 1.5 SQ ELASTOPHENE SANDED BASE SHEET

Item #2220300 1 SQ ELASTOPHENE FR GR WHITE

Item #2220330 1 SQ ELASTOPHENE GR WHITE

Item #2220310 1 SQ SOPRALENE 180 FR GR WHITE

Item #2220333 1.5 SQ ELASTOPHENE 180 SANDED BASE SHEET

Item #2220320 1.5 SQ SOPRALENE STICK PEEL & STICK BASE SHEET

Item #2220336 1.5 SQ ELASTOPHENE 180 PS

Item #2220331 1 SQ SOPRALENE 180 GR WHITE

Item #2220510 1 SQ ELASTOPHENE FLAM GR WHITE CAP SHEET

Item #2220410 1 SQ SOPRALENE FLAM 180 BASE SHEET

Item #2220500 1 SQ ELASTOPHENE FLAM FR GR WHITE CAP SHEET

Item #2220501 1 SQ SOPRALENE FLAM 180 FR GR WHITE CAP SHEET

Item #2220400 1 SQ ELASTOPHENE FLAM BASE SHEET

Item #2220511 1 SQ SOPRALENE FLAM 180 GR WHITE CAP SHEET

Item #2220401 1.5 SQ ELASTOPHENE FLAM 2.2MM BASE SHEET

Item #2220321 1.5 SQ SOPRENA FLAM STICK BASE SHEET

Soprema



SOPREMA has been manufacturing roofing and waterproofing products since 1908. Over the last 100 years, we have perfected the art of creating the world's finest SBS Modified Bitumen roofing membranes.



Item #2220600 1/8" 4x8 SOPRABOARD

Item #2220340 1 SQ COLPHENE GR WHITE PEEL & STICK CAP SHEET

Item #2220341 1 SQ COLPHENE GR BLACK PEEL & STICK CAP SHEET

Item #2220350 3 SQ MODIFIED SOPRA G BASE SHEET

Item #2220345 1 SQ SOPRALAST 50 TV ALU

FIELD MEMBRANES SELECTOR	Method of Application	BASIC	OPTIMAL	HEAVY DUTY
FIELD BASE MEMBRANE PLY	MOP	23 ELASTOPHENE PS	24 ELASTOPHENE 180 PS	34 SOPRALENE 180 PS 3.5 MM
FIELD CAP MEMBRANE PLY	TORCH	53 ELASTOPHENE FLAM GRANULES	50 SOPRALENE FLAM 180 GRANULES	51 SOPRALENE FLAM 250 GRANULES
	• FIRE RATED - TORCH	55 ELASTOPHENE FLAM FR GRANULES	48 SOPRALENE FLAM 180 FR GRANULES	54 SOPRALENE FLAM 250 FR GRANULES

FLASHING SYSTEMS Method of Application	FLASHING SYSTEMS DESIGNATION	STANDARD		HEAVY DUTY	
		FIRST MEMBRANE FLASHING PLY	CAP MEMBRANE FLASHING PLY	FIRST MEMBRANE FLASHING PLY	CAP MEMBRANE FLASHING PLY
	A	32 SOPRALENE FLAM 180	50 SOPRALENE FLAM 180 GRANULES	31 SOPRALENE FLAM 250	60 SOPRALENE FLAM 350 GRANULES
			57/58/SOPRALAST 50 TV 59 ALU/COPPER/STAINLESS	36 SOPRALENE FLAM 350	60 SOPRALENE FLAM 350 GRANULES
	B	24 ELASTOPHENE 180 PS	50 SOPRALENE FLAM 180 GRANULES	34 SOPRALENE 180 SP 3.5 MM	51 SOPRALENE FLAM 250 GRANULES
			57/58/SOPRALAST 50 TV 59 ALU/COPPER/STAINLESS		60 SOPRALENE FLAM 350 GRANULES

Napco
Geocel
Mid-States



Each system includes: Pro Fit™ Pocket, 1 cartridge of 4500 black, 1 pouch of 4515 (2" system) or 2 pouches of 4515 (4" system), 4 self-tapping screws, and a troweling tool



Geocel Pro Fit Pitch Pocket System 2"



Item #4707002

Geocel Pro Fit Pitch Pocket System 4"

Item #4707004

Pro Fit™ Pocket Penetration Sealant System

- Maximum value with minimal waste
- Can be installed in wet conditions
- Convenient, complete system
- Create single or multiple pockets
- Easy, worry-free installation

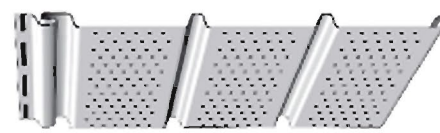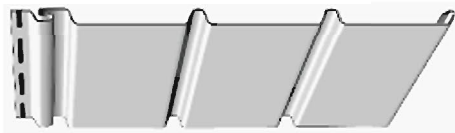

Napco T-4 Solid Soffit White
Item #5140300

Napco T-4 Vented Soffit White
Item #5140400

ValleyFast 100
Item #1803592

Valleyfast 100 is a multipurpose fiberglass reinforced sheet coated with a technologically advanced SBS formulation. Only the highest quality asphalt and polymers are used to make our new Valleyfast 100 product. The result is a membrane that is highly pliable, very durable, and extremely versatile.

Valleyfast 100 has higher tensile strengths and greater waterproofing capabilities when compared with your typical asphalt saturated organic felts. Valleyfast 100's high degree of versatility makes it an excellent choice for use under metal, composition shingles, and shake applications.

Specifications

Approximate Thickness	55 Mils
Tensile Strength	MD=45, CD=45
Tear Strength	Pass
Dimensional Stability	Pass
Pliability @ 77 °F	Pass
Liquid Water Transmission Test	Pass
Moisture Vapor Permeability	0.1 U.S. Perm or less



Karnak Firestone Eternabond



5540 Resat-Mat Item #1411164

Karnak #5540 Resat-Mat spunlaced fabric is a textile material composed of polyester fibers entangled to form a strong reinforcing fabric with cold roofing mastics and liquid elastomers. Composed of 100% polyester, Karnak #5540 Resat-Mat has excellent conformability, making it ideal for replacing felts and fiberglass as reinforcing mats on rough roof surfaces, such as transit roofs, metal roofs or gravel surfaces. The distinctive characteristics of Karnak #5540 Resat-Mat include high tensile strength compiled with high elongation, outstanding tear strength and toughness, high bulk and porosity, non-raveling edges, and excellent dimensional stability.

PHYSICAL PROPERTIES	
Roll Size	40" x324'
Weight oz/yd2:	2.75
Lbs./10 squares:	19
Elongation:	41%
Tear Strength:	13 lbs.
Mullen Burst:	99 lbs.
Tensile Strength:	32 lbs.



Firestone ISO GARD HD 4'x8' Item #2503620

Features

- 1/2" thickness, with high density core
- Closed-cell polyisocyanurate (polyiso) core made with IsoGard™ foam technology
- Excellent wind-uplift performance (see chart at left)
- Manufactured with a coated fiberglass facer
- Incorporates blowing agent that contains no hydrochlorofluorocarbons (will not deplete ozone)



Eternabond DoubleStick 2" x 2' Tape Item #5803042

DoubleStick MicroSealant Putty Tape is the RVer's friend. Use it to seal overlapping products, such as between skylight and vent flanges and the roof. Twist it into a rope and use it as a gasket, or for sealing around floor penetrations and penetrations in the bottom of the RV.

Karnak Safety Equipment



Rope Grabs

Item #3145001

Designed for use with 5/8" synthetic 3-strand rope. Made from high strength aluminum alloys for maximum working capacity with minimum weight.

This unit used in conjunction with WALL component as a system can be safely used without a shock absorber.

Certified to meet all applicable ANSI and OSHA standards.



Karnak 155AF

Item #1411008

Karnak #155AF Amphibikote is a cold process, heavy bodied, trowel applied emergency roof cement ideal for repairing leaks in asphalt built-up roofs, flashing on walls, chimneys, skylights and vents, down-spouts and gutters. The dried film retains its flexibility and ductility so the coating will resist extreme variations in temperature and weather.

SPECIFICATION


ASTM D-4586 Type I

Federal Specification SS-C-153 Type I (AF)

Karnak #112 Foundation Coating

Item #1411030

Karnak #112 Foundation Coating is a blend of heavy bodied asphalt cut-back and high grade solvents. This protective coating forms a smooth, tough, elastic film which gives an excellent performance over a wide range of temperature and service conditions. Karnak #112 Foundation Coating is used primarily to protect and dampproof masonry walls. The inherent strength and adhesion of this coating serve to help retard the entrance of moisture into or through the foundation wall.

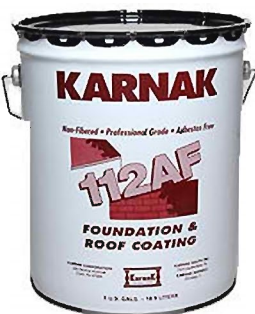

PHYSICAL PROPERTIES

Weight per Gallon: 7.80

Solids by Weight: 70%

Solids by Volume: 64%

Color: Black

Dry Time Hours: 8 to 24

Service Temperature Range: 0°F to 180°F

229AR Elastomeric Brush

Item #1411056

Karnak's #229 AR-Elastomeric is a single component, SBS rubber reinforced asphalt which forms an elastomeric roof coating. Karnak #229 AR Elastomeric has excellent elongation properties, good cold weather pliability and excellent water and weather resistance.



PHYSICAL PROPERTIES

Hardness, Shore A: 55 ASTM D-2240

Elongation - Brush: 700% ASTM D-412

Elongation - Trowel: 500% ASTM D-412

Tensile Strength, PSI: 400 ASTM D-412

Color: Black

Water Vapor Permeance: 0.017 perm ASTM E-96

Air Permeability (Leakage): 1.000 L/(s.m²) @ pressure difference of 75 PA ASTM E-283

Water Absorption: 0.07

Weight per Gallon: 8.60 lbs.

Solids:Trowel 65%

Solids:Brush 60%


Solids:Spray 55%

James Hardie

REESE

WHOLESALE.COM

Our fiber cement trim and fascia add the finishing touches to a beautiful, lasting James Hardie home, and are all engineered for climate, so you get the right product for your home no matter how harsh the weather is where you live. HardieTrim® boards provide unmatched durability and allow you to create a variety of design possibilities for trim, gables, corners, fascia, windows, doors, column wraps, rakes, friezes, decorative trim and other non-structural architectural elements

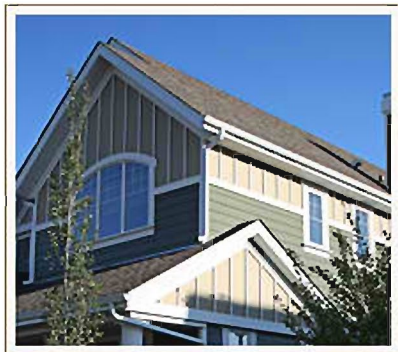

Hardie Trim Tabs Flat 3"

Item #5404560

Hardie Trim Tabs Corner 5"

Item #5404561

New HardieTrim® 12' boards have been specifically designed to deliver superior performance under varying climatic conditions. Made of the highest quality materials available, dimensionally stable HardieTrim boards are resistant to damage from water, insects, harsh weather and are low maintenance for long lasting beauty.

Hardie NT3 Trim

Primed 5/4x4" Item #5400174

Primed 5/4x8" Item #5400175

Navajo 5/4x4" Item #5401703

Navajo 5/4x6" Item #5401733

Navajo 5/4x8" Item #5401753

Navajo 5/4x10" Item #5401773


Navajo 5/4 x12' Item#5401774

Arctic White 5/4x4" Item #5401705

Arctic White 5/4x6" Item #5401735

Arctic White 5/4x8" Item #5401755

Timber Bark 5/4x8" Item #5401745

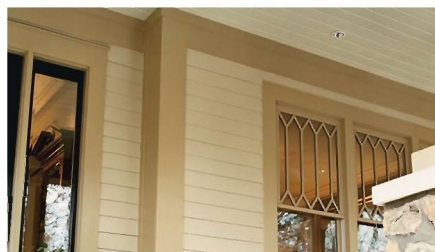


Our new 5/4 HardieTrim® boards are now available in 12' lengths

- Improved aesthetics with concealed fastening system
- Fewer seams and reduced waste
- Quicker installation
- Improved handle-ability

Product Review
Lead, Copper, Sunhaven



These Are Special Order Only
We Do Not Stock Sun Haven Awnings



Features:

- * Constructed of all aluminum components
- * Standard, Roll Form, available in white or tan
- * Step-down style available in a wide variety of colors
- * Factory pre-assembled for easy installation
- * Standard with all necessary hardware
- * All aluminum support columns available in white, brown, black or tan
- * Scallop also available in a wide variety of colors

Don't Forget!

Reese Wholesale Stocks Lead Sheets, Lead Boots, & Copper Sheets

- Item #3527366 2.5# 15x15x162 IN ADJ LEAD PIPE BOOT FLASHING
- Item #3527367 2.5# 15x15x163 IN ADJ LEAD PIPE BOOT FLASHING
- Item #3527368 36 IN X 36 IN LEAD SHEET
- Item #3527369 2.5# 15x15x164 IN ADJ LEAD PIPE BOOT FLASHING
- Item #3527370 2.5# 15x15x165 IN ADJ LEAD PIPE BOOT FLASHING
- Item #3511902 COPPER SHEET 30 IN X 120 IN
- Item #3511904 COPPER SHEET 36 IN X 120 IN